


GAMMA SERIES™

MONOFACIAL | PV MODULE

PERC Cell Technology | P-Type

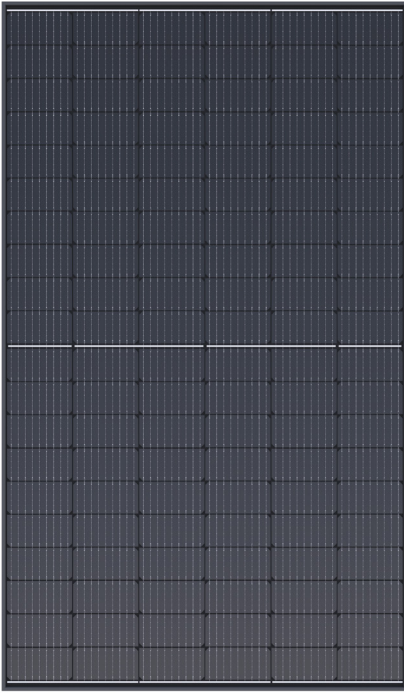

Power Range: 355W | 360W | 365W | 370W
Technology: PERC | Half cut cell | 9 Busbar | 120 Cells
Design: Single Glass | Black Frame | Black Backsheet

Module Efficiency: 20.0%
Cell Efficiency: 22.5%~23.3%
Power Tolerance: 0~+5W
System Voltage: 1000/1500 V DC

Module Size: 69.72 x 41.19 x 1.38 inch
Module Weight: 46.30 lb.
Module Code: BVM6610M-XXS-H-HC

DESIGNED TO PERFORM AND BUILT TO LAST

Our PV modules are designed with better technology in mind, made from robust product components, under stringent quality control steps and high-tech manufacturing processes.

PERC, half-cut, multi-busbar, and large cell designs enables our PV modules to pack more power per module, capture more

photons, produce more energy, and provide reliable, dependable system performance under different installations requirements, difficult weather, or environmental conditions. Whether you are EPC, installer, contractor, or project developer, we have the right and better PV module for your residential, commercial, industrial, and utility scale solar projects.

Monocrystalline technology

P-Type semiconductor

Passivated emitter and rear cell technology

Half cut cell

Multi-Busbar cell


Large wafer design

Beautiful aesthetic

Robust product component

WARRANTY

25-Year linear power warranty
 12-Year product warranty

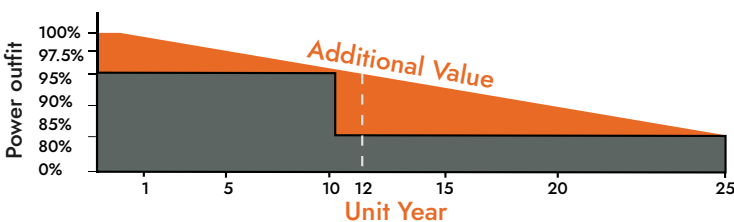

Output Linear Warranty

1 (12) years product warranty

Standard Warranty

2 Out linear warranty with 2.5% degradation in the 1st year and less than 0.6% degradation each year from 2nd year to 25th year

CERTIFICATES

UL 61730 | IEC 61215 | IEC 61730 | CEC Listed | CE

ISO 9001 Quality Management System

ISO 14001 Environmental Management System

ISO 45001 Occupational Health and Safety Management System

*Please contact with Boviet Solar representative for Full list of certificates according to local requirements and PV module product type.

ELECTRICAL CHARACTERISTICS I STC

Maximum Power (Pmax)	355W	360W	365W	370W
Maximum Power Current (Imp)	10.70A	10.78A	10.87A	10.96A
Maximum Power Voltage (Vmp)	33.23V	33.45V	33.63V	33.81V
Short Circuit Current (Isc)	11.29A	11.37A	11.46A	11.54A
Open Circuit Voltage (Voc)	40.02V	40.21V	40.38V	40.56V
Module Efficiency	19.2%	19.4%	19.7%	20.0%
Power Tolerance	0~+5W	0~+5W	0~+5W	0~+5W

STC: AM1.5 Irradiance 1000W/m², 25° C

ELECTRICAL CHARACTERISTICS I NOCT

Maximum Power (Pmax)	355W	360W	365W	370W
Maximum Power (Pmax)	268.85W	272.65W	276.41W	280.19W
Maximum Power Current (Imp)	8.68A	8.74A	8.82A	8.89A
Maximum Power Voltage (Vmp)	30.98V	31.18V	31.35V	31.52V
Short Circuit Current (Isc)	9.07A	9.14A	9.21A	9.27A
Open Circuit Voltage (Voc)	37.50V	37.67V	37.83V	38.00V

NOCT: AM 1.5 Irradiance 800W/m², 20° C, Wind speed 1m/s

MECHANICAL CHARACTERISTICS

Solar Cell	Monocrystalline I PERC PV cells 166mm cell I Half-cut I 9 Busbar I 120 (6x20) pcs in series
Solar Modules	Monofacial I 69.72 x 41.19 x 1.38 inch. I Weight: 46.30 lb.
Module Glass	3.2 mm (0.13 inch) High transparency, low iron, AR-coated tempered glass
Module Frame	Frame 35 mm Ultra-strong, anodized aluminum alloy frame
Module Junction Box	IP68 rated I 3 bypass diodes
Module Output Cable	4mm ² (EU) I 12 AWG (US) 39.38 inch
Module Connector	MC4 / JM608 *Please confirm the connector type with Boviét Solar before order processing.
Module Encapsulant	EVA (ethyl vinyl acetate)
Module Backsheet	FFC backsheet
Module Fire Type	Type 1 Fire rated

PACKING INFORMATION

Pieces per pallet:	31
Pallets per container (40HQ):	26
Pieces per container (40HQ):	806
Pallet Weight:	1545.44 lb.
Pallet Dimension:	70.92 x 44.69 x 45.88 inch

MAXIMUM RATING

Operating Temperature	-40°F~185°F
Maximum Series Fuse Rating	20A
Isc Temperature Coefficient	1000/1500V DC


THERMAL CHARACTERISTICS

Pmax Temperature Coefficient	-0.35%/K
Voc Temperature Coefficient	-0.28%/K
Isc Temperature Coefficient	+0.049%/K
NOCT	113±35.6 F

BOVIET SOLAR | www.bovietsolar.com | V4 | July 2023


Disclaimer: The information included in this PV module datasheet is subject to change without any notice and is provided for informational purposes only. No contractual rights are established or should be inferred because of the user's reliance on the information contained in this PV module datasheet. Please contact Boviét Solar's local offices for updated product information. Thank you.

PV Module: Mechanical Drawing

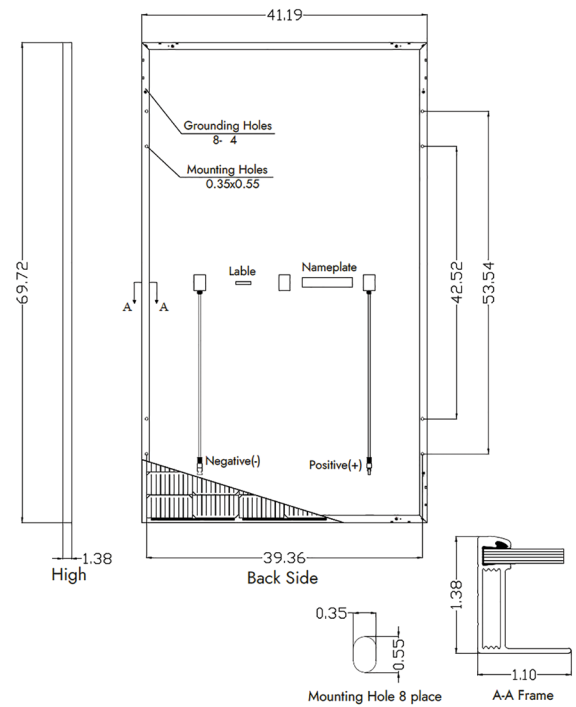

PV Module: IV Curve

Irradiance: AM 1.5, 1,000W/m²(370W)

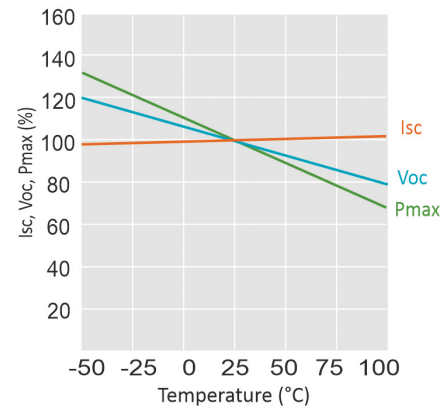

PV Module: IV Curve

I-V Curves at Different Irradiances (370W)
Test Temperature: 25°C

